


CYLINDERS ALUMINIUM PROFILE

SERIES 41K

Double-acting, cushioned, magnetic
 Ø 160 - 200 mm



- In compliance with ISO 15552 standard and with the previous DIN/ISO 6431 - VDMA 24562 standard
- Rolled stainless steel rod
- Adjustable pneumatic cushioning
- Rod scraper in brass

Series 41K cylinder comply with the ISO 15552 standard and can be assembled with the entire range of standard accessories.

The mounting brackets used on the end-blocks tube are designed in an extremely secure way, making use of cylinder tie-rods positioned internally and not visible on the assembled cylinder.

This cylinder series is normally equipped with adjustable endstroke cushioning by means of a screw positioned on the end-block.

General Data

Type of construction	Profile (with tie-rods)
Operation	Double-acting
Design	ISO 15552
Materials	AL end blocks and piston Rolled AISI 420B stainless steel piston rod Zinc-plated steel piston rod nut Anodized AL-profile tube Zinc-plated steel tie-rods and tie-rod nuts NBR-PU rod Piston Cushion seals Brass rod scraper
Mounting	With front flange Rear flange Foot mounts Centre trunnion Front and rear trunnion
Strokes min - max	10 ÷ 2500 mm
Working temperature	0°C ÷ 80°C (with dry air - 20°C)
Working pressure	1 ÷ 10 bar
Speed	10 ÷ 500 mm/sec (without load)
Fluid	Filtered air, without lubrication. If lubricated air is used, it is recommended to use oil ISO VG32. Once applied the lubrication should never be interrupted.

CYLINDERS ALUMINIUM PROFILE
SERIES 41K - STROKES

PNEUMATIC ACTUATION

1

Standard strokes

✕ = Double-acting

Ø	50	100	150	200	400	500
160	✕	✕	✕	✕	✕	✕
200	✕	✕		✕		


Coding Example

41	K	2	P	160	A	0200
41	SERIES					
K	VERSION K = Standard magnetic					
2	OPERATION 2 = Double-acting, front and rear cushions 3 = Double-acting, no cushion 4 = Double-acting, rear cushions 5 = Double-acting, front cushion 6 = Double-acting, through-rod, front and rear cushions 8 = Double-acting, through-rod, no cushion					PNEUMATIC SYMBOLS CD09 CD07 CD37 CD38 CD13 CD14
P	MATERIALS P = See the General Data table on the previous page R = AISI 420B stainless steel tie-rods, AISI 303 stainless steel tie-rod nuts C = Rolled AISI 303 stainless steel piston rod, AISI 304 stainless steel piston rod nut U = Rolled stainless steel AISI 303 piston rod, AISI 304 stainless steel piston rod nut, stainless steel AISI 420B tie-rods, stainless steel AISI 303 tie-rod nuts W = Rolled AISI 304 stainless steel piston rod, AISI 304 stainless steel piston rod nut, AISI 420B stainless steel tie-rods, AISI 303 stainless steel tie-rod nuts					
160	BORE 160 = 160 mm 200 = 200 mm					
A	TYPE OF DESIGN A = Standard F = Cylinder with centre trunnion					
0200	STROKE					
	SEAL OPTIONS = Standard V = Rod Seal FKM W = All seals in FKM +130°C G = With brass rod scraper (chrome plated AISI 420B stainless steel rod, NBR rod seal) [Ø 250 and 320 excluded]					
	ROD LENGTH = Standard (_ _ _) = Rod extended with _ _ _ mm					
	PROTECTION OPTIONS = Standard C = PU coated cylinder. Colour: Grey [available on request]					
	CERTIFICATIONS = Standard EX = ATEX					


Pneumatic symbols

The pneumatic symbols indicated in the Coding Example are shown below.


CD09




CD07




CD37




CD38



CD13



CD14




Accessories for series 41K cylinders

Clevis pin Mod. S

Rear trunnion, male Mod. L

90° swivel combination Mod. ZS

Front and rear flange Mod. D-E

Centre trunnion Mod. F

Foot mount Mod. B

Front and rear female trunnion Mod. C-H

Swivel ball joint Mod. GA

Swivel combination Mod. C+L+S

Self aligning rod Mod. GK

Proximity switch Mod. CSN


Adapter Mod. S53 for CSN proximity switches


CYLINDERS ALUMINIUM PROFILE
SERIES 41K - DIMENSIONS

Cylinders

PNEUMATIC ACTUATION


1

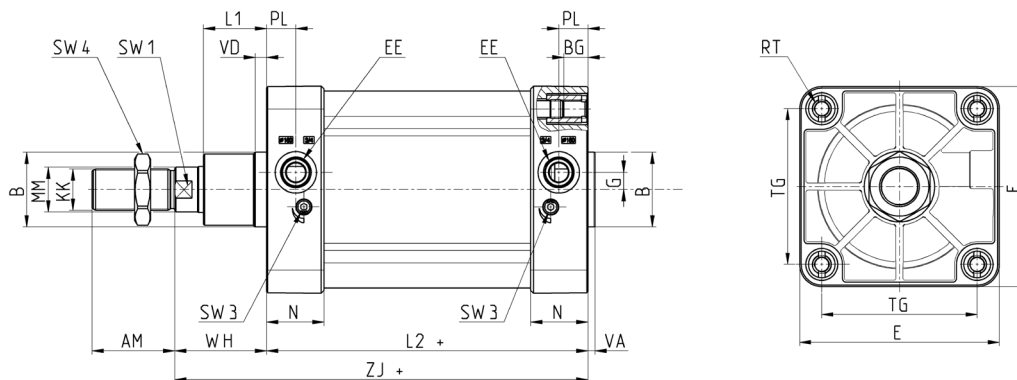

+ = add the stroke

Ø	MM	KK	B	PL	G	L1	AM	VA	EE	WH	L2+	ZJ+	VD	N	RT	BG	TG	E	SW1	SW3	SW4	Cushion stroke
160	40	M36x2	65	25,5	15	55	72	6	G3/4	80	180	260	10	50	M16	24	140	180	36	4	55	33
200	40	M36x2	75	25,5	15	65	72	8	G3/4	95	180	275	25	50	M16	24	175	220	36	4	55	48


Cylinders - through-rod

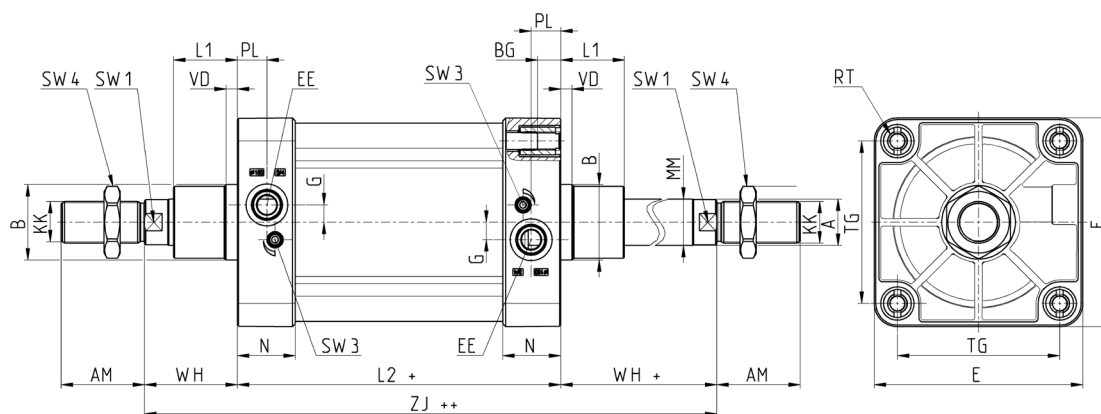

+ = add the stroke once
++ = add the stroke twice

Ø	MM	KK	B	PL	G	L1	AM	VA	EE	WH	L2+	ZJ+	VD	N	RT	BG	TG	E	SW1	SW3	SW4	Cushion stroke
160	40	M36x2	65	25,5	15	55	72	6	G3/4	80	180	260	10	50	M16	24	140	180	36	4	55	33
200	40	M36x2	75	25,5	15	65	72	8	G3/4	95	180	275	25	50	M16	24	175	220	36	4	55	48

Cylinders with trunnion Mod. F assembled

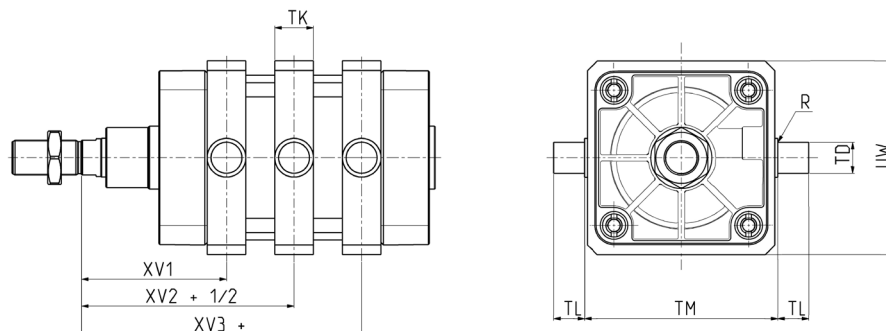


+ = add the stroke
+ 1/2 = add half the stroke

Mod.	Ø	XV1	XV2+1/2	XV3 +	TM	TK	TD	TL	UW	R
F-160	160	150	170	190	200	40	32	32	190	2
F-200	200	165	185	205	250	40	32	32	240	2

Foot mount Mod. B



Supplied with:
2x foot mounts in black-painted steel (cataphoresis)
4x white zinc-plated screws

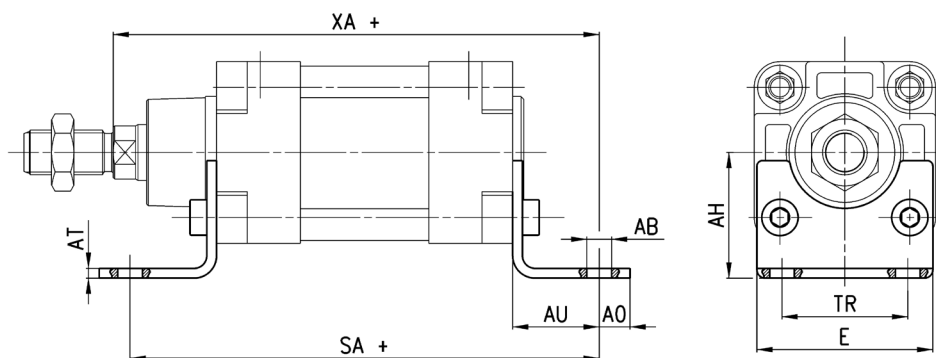

+ = add the stroke


Mod.	Ø	AT	SA +	XA +	TR	E	AB	AH	A0	AU
B-41-160	160	10	300	320	115	175	18,5	115	25	60
B-41-200	200	12	320	345	135	238	24	135	35	70

CYLINDERS ALUMINIUM PROFILE
SERIES 41K - ACCESSORIES

Front and rear flange Mod. D-E


PNEUMATIC ACTUATION

1



Material:
aluminium for Ø 160 +
Ø 200;

Supplied with:
1x flange
4x screws

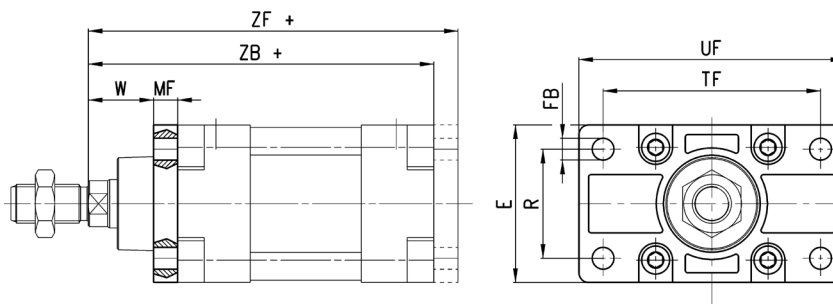

+ = add the stroke


Mod.	Ø	W	MF	ZB +	TF	R	UF	E	FB	ZF +
D-E-41-160	160	60	20	260	230	115	260	180	18	280
D-E-41-200	200	70	25	275	270	135	300	220	22	300

Front or rear female trunnion Mod. C-H



Material:
aluminium

Supplied with:
1x female trunnion
4x screws

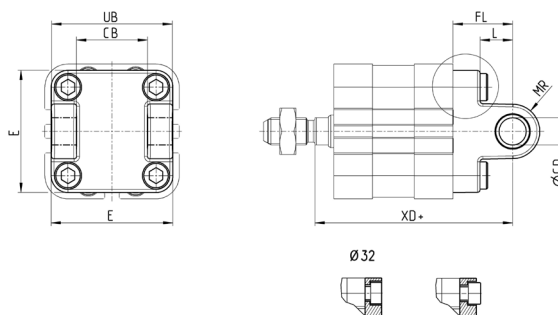

+ = add the stroke


Mod.	Ø	ØCD	L	FL	D +	XD +	MR	E	CB	UB
C-H-41-160	160	30	35	55	180	315	30	175	90	170
C-H-41-200	200	30	35	60	180	335	30	215	90	170

Rear male trunnion Mod. L



Material:
aluminium

Supplied with:
1x male trunnion
4x screws

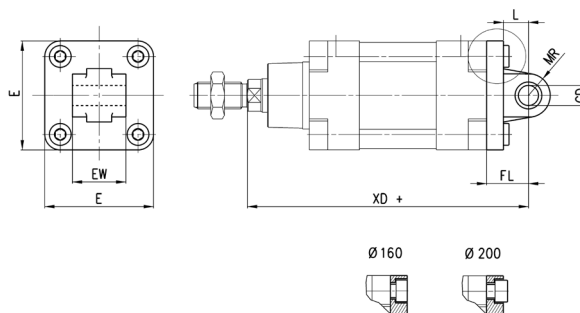

+ = add the stroke


Mod.	Ø	ØCD	L	FL	XD +	MR	E	EW
L-41-160	160	30	35	55	315	30	175	90
L-41-200	200	30	35	60	335	30	215	90

Centre trunnion Mod. F



Material:
white zinc-plated steel

Supplied with:
1x centre trunnion
4x fixing elements
4x nuts

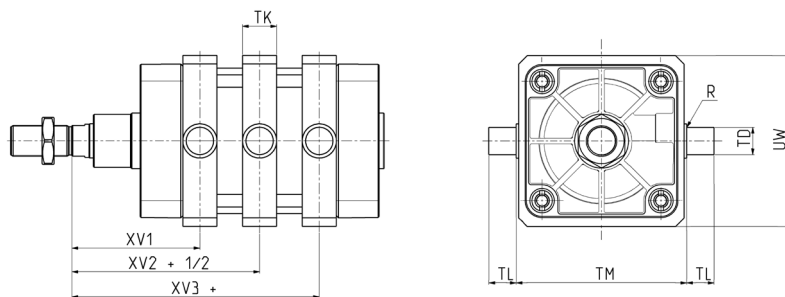


+ = add the stroke

Mod.	Ø	XV1	XV+1/2	XV3 +	TM	h	TD	TL	UW	R
F-41-160	160	150	170	190	200	40	32	32	190	0,2
F-41-200	200	165	185	205	250	40	32	32	240	0,2

90° Swivel combination Mod. ZS



Supplied with:
1x aluminium swivel
combination 45°

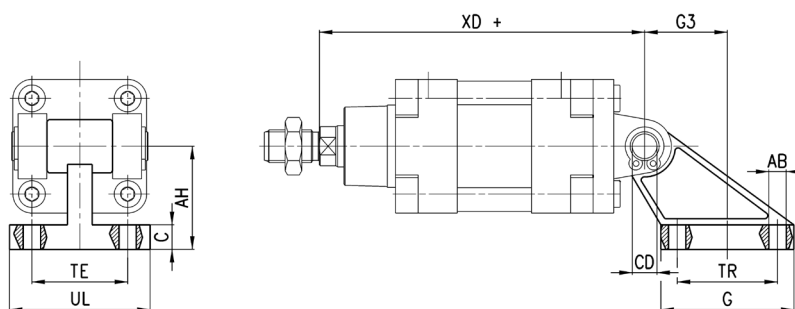


+ = add the stroke

Mod.	Ø	TE	TR	AB	AH	C	G	CD	UL	XD +	G3°
ZS-160N	160	118	88	14	115	20	126	30	156	315	53
ZS-200N	200	122	90	18	135	25	130	30	162	335	60

Accessory combination Mod. C+L+S



Material:
aluminium

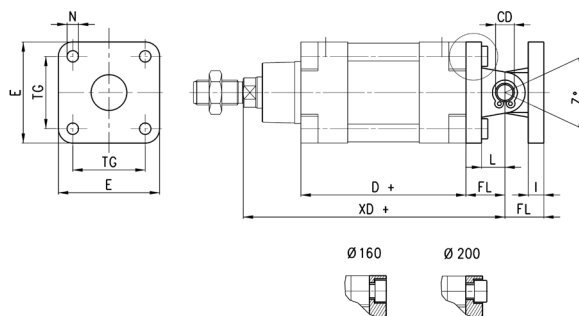

+ = add the stroke

Mod.	Ø	CD	L	FL	D +	XD +	TG	E	N	I	Z° (max)
C+L+S	160	30	35	55	180	315	140	175	17	20	25
C+L+S	200	30	35	60	180	335	175	215	17	25	20

Counter bracket for centre trunnion Mod. BF


PNEUMATIC ACTUATION

1



Material:
aluminium

Supplied with:
2x supports

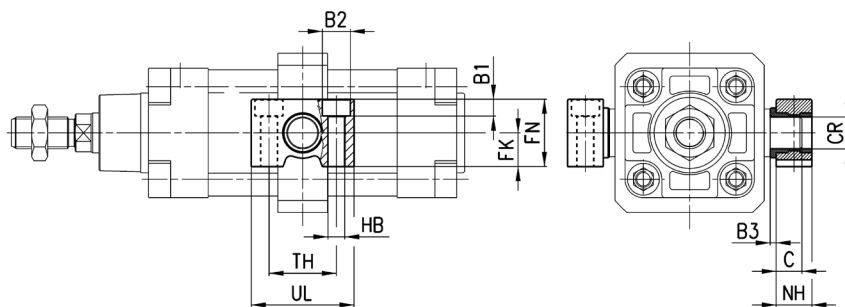


Mod.	Ø	øCR	NH	C	B3	TH	UL	FK	FN	B1	øB2	øHB
BF-160-200	160-200	32	35	17,5	4	60	92	30	60	16	26	18

Rod fork end Mod. G



ISO 8140

Material:
zinc-plated steel



+ = add the stroke


Mod.	Ø	øCK	LE	CM	CL	ER	CE	KK	B	øB1
G-160-200	160-200	35	72	35	70	44	144	M36x2	92	60

Swivel ball joint Mod. GA



ISO 8139

Material:
zinc-plated steel




Mod.	Ø	øCN	U	EN	ER	AX	CE	KK	øT	Z	SW
GA-160-200	160-200	35	28	43	40	56	125	M36x2	46	6	50

Clevis pin Mod. S



Materials:
Stainless steel Clevis pin,
Steel Seeger

Supplied with:
1x clevis pin
2x seeger in steel

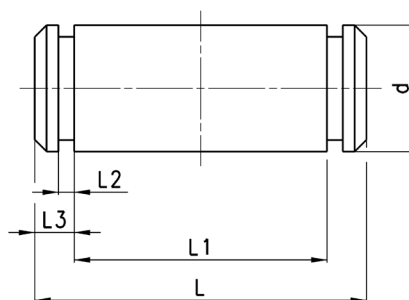


Mod.	Ø	d	L	L1	L2	L3
S-160-200	160-200	30	180,5	172	1,6	4,25

Piston rod lock nut Mod. U



UNI EN ISO 4035

Material:
zinc-plated steel

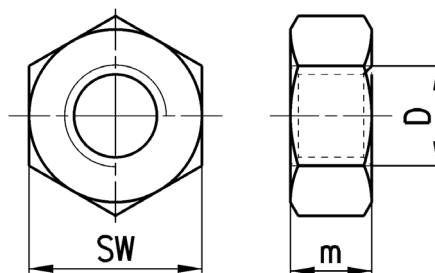


Mod.	Ø	D	m	SW
U-160-200	160-200	M36x2	14	55

Self aligning rod Mod. GK



Material:
zinc-plated steel

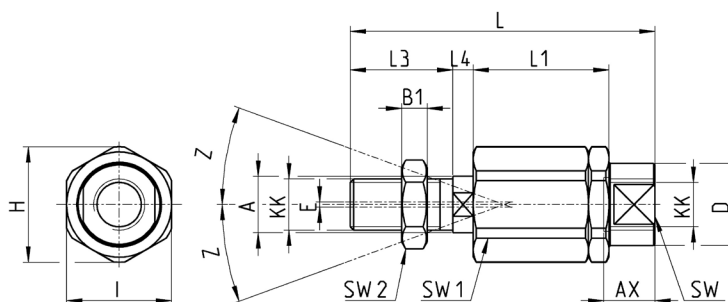

Mod.	Ø	KK	L	L1	L3	L4	gA	gD	H	I	SW	SW1	SW2	B1	AX	Z	E
GK-160-200	160-200	M36x2	190	77	72	15,5	39	57	75	70	54	32	55	14	68	4	2


Proximity switches - Mod. CSN

PNEUMATIC ACTUATION

1



The relating adapter S53 has to be ordered separately.

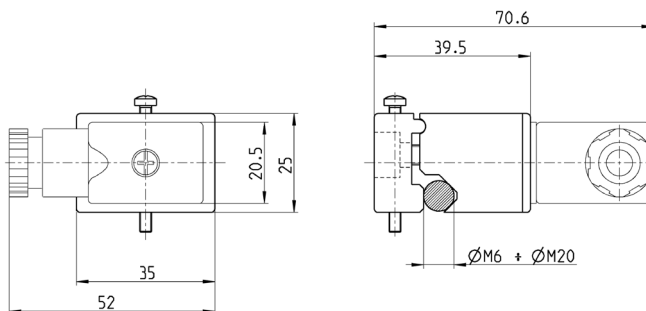


Mod.	Series	Ø
CSN-2032-0	41K	160-200

Adapter Mod. S53 for CSN proximity switch



Material:
aluminium

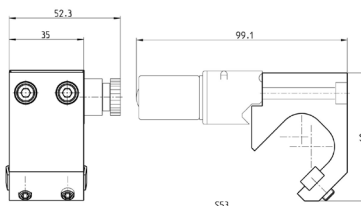


Mod.	Series	Ø
S53	41K	160-200

Special key to disassemble cylinders



Material:
steel

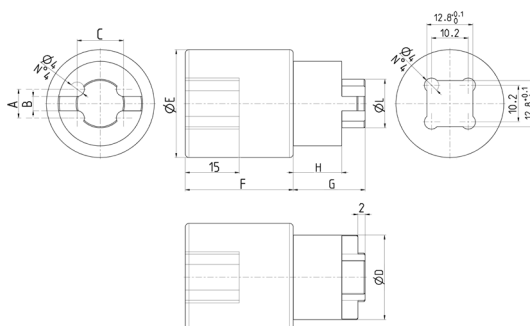

Mod.	Ø	A	B	C	ØD	ØE	F	G	H	ØL
160-200-40K/8C	160/200	8	4	12,9	23,5	30	30	20	13,5	13,5
250-40K/8C	250	9,5	5	16,6	31,5	30	27	24	16	17,5
320-40K/8C	320	9,5	5	20,3	35,5	32	27	24	16	21