SILENCERS
SERIES 29

Series: 2901 - 2903 - 2921 - 2931 - 2928 - 2929 - 2905
Ports: M5, G1/8, G1/4, G3/8, G1/2, G3/4, G1
Ø 4, 6, 8, 10, 12 mm



The silencers are indispensable elements for eliminating or reducing the characteristic noise of compressed air during discharge operations.
They should always be placed on the outlets of 3/2, 5/2 or 5/3-way valves.
When carrying out maintenance, the silencers should be degreased using white spirit or paraffin and compressed air blown through them in the opposite direction to operation.

Flow rate: determined with inlet supply 6 bar and output in atmosphere.

Noise level: determined through a test which is carried out using a phonometer.
Placing the phonometer one meter away from the application at the same height for a period of ten seconds gives an average reading of the noise generated.

General Data

Construction	Body with male and female thread
Materials used for body	X2901: 316L Stainless steel 2901 - 2903: Brass 2921 - 2931: Coppering steel 2928 - 2929: Polyethylene
Materials used for silencing	X2901: Stainless steel 2901 - 2903: Stainless steel 2921 - 2931: Bronze (sintered) 2928 - 2929: Polyethylene (sintered)
Ports	M5 - G1/8 - G1/4 - G3/8 - G1/2 - G3/4 - G1 1/8NPT , 1/4NPT , 3/8NPT , 1/2NPT , 3/4NPT , 1NPTØ 4, 6, 8, 10, 12 mm

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com
This document contains a description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com


SILENCERS
SERIES 29 - DIMENSIONS

Stainless steel 316L silencer Mod. X2901





SIL1

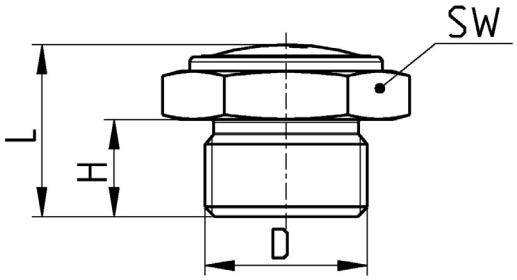


Mod.	D	H	L	SW	Max. operating pressure [bar]	Flow rate (Nl/min)	Noise db (A)
X2901 1/8	G1/8	8	15	14	10	700	76
X2901 1/4	G1/4	8	14	17	10	1000	78
X2901 3/8	G3/8	10	18	22	10	1500	76
X2901 1/2	G1/2	12	22	27	10	3400	86
X2901 3/4	G3/4	15	27	32	6	4100	87
X2901 1	G1	18	34	41	6	7600	88
X2901 1/8PT	1/8 NPT	7	14	14	10	700	76
X2901 1/4PT	1/4 NPT	11	17	17	10	1000	78
X2901 3/8PT	3/8 NPT	11	19	22	10	1500	76
X2901 1/2PT	1/2 NPT	15	25	27	10	3400	86
X2901 3/4PT	3/4 NPT	16	28	32	6	4100	87
X2901 1PT	1 NPT	19	35	41	6	7600	88

Silencers Series 2901



SIL1

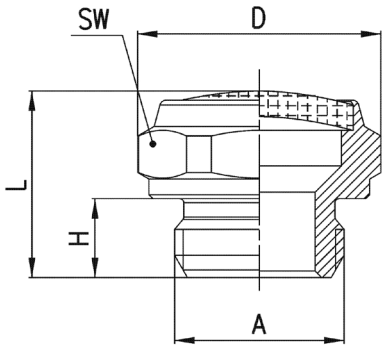

Mod.		A	D	H	L	SW	Max. operating pressure [bar]	Flow rate [Nl/min]	Noise db (A)
2901 M5	*	M5	9	4	8,5	8	10	150	66
2901 1/8		G1/8	15,3	5	12	14	10	700	76
2901 1/4-17		G1/4	18,5	6	14	17	10	1000	78
2901 1/4-22		G1/4	23,5	6	15	22	10	1600	80
2901 3/8		G3/8	23,5	7	16	22	10	1500	76
2901 1/2		G1/2	29,5	8	17,5	27	10	3400	86
2901 3/4		G3/4	34	9	20	32	6	4100	87
2901 1		G1	43	11	24,5	40	6	7600	88

* Sintered bronze silencer element.


Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com
This document contains a description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com

Silencers Series 2903





SIL1

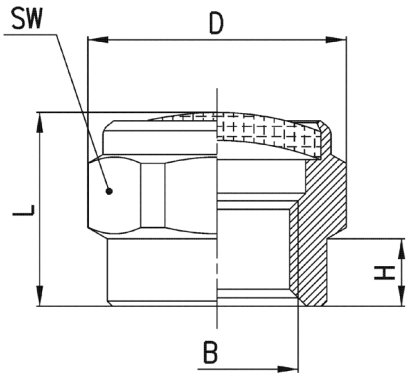


Mod.	B	D	H	L	SW	Max. oper. pressure	Flow rate [Nl/min]	Noise db (A)
2903 1/8	G1/8	15,3	4	11	14	10	700	74

Silencers Series 2921





SIL1

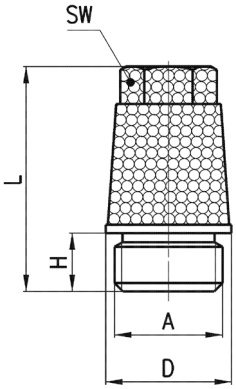

Mod.	A	D	H	L	SW	Max. oper. pressure	Flow rate [Nl/min]	Noise db (A)
2921 1/8	G1/8	12	4,5	21,5	8	10	1730	81
2921 1/4	G1/4	15	6	28	10	10	3300	85
2921 3/8	G3/8	19	8	37	13	10	4250	79
2921 1/2	G1/2	23	9	43,5	15	10	6800	87
2921 3/4	G3/4	30	10	56	19	10	9800	84
2921 1	G1	37	12	67	24	10	10900	86

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com
This document contains a description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com


SILENCERS
SERIES 29 - DIMENSIONS

Silencers Series 2931





SIL1

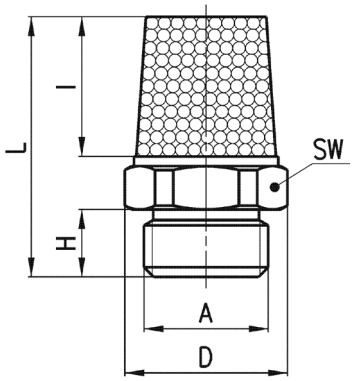


Mod.	A	D	H	I	L	SW	Max. oper. pressure	Flow rate [Nl/min]	Noise db (A)
2931 M5	M5	7,7	4	8	16,5	7	10	450	69
2931 M7	M7	9	5	8,5	20	8	10	1130	76
2931 1/8	G1/8	13	4,5	13	21	12	10	1927	88
2931 1/4	G1/4	16,2	6	16,5	27	15	10	3200	86
2931 3/8	G3/8	20	7	23	35,5	19	10	4560	81
2931 1/2	G1/2	24,5	8	28	42	23	10	6800	87
2931 3/4	G3/4	32	9	37	54	30	10	9600	84
2931 1	G1	38,5	11	47	67	36	10	10800	86

Silencers Series 2928






SIL1

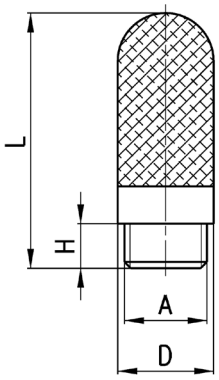


Mod.	A	D	H	L	Max. oper. pressure	Flow rate [Nl/min]	Noise db (A)
2928 M5	M5	6,5	4	21,5	10	320	69
2928 1/8	G1/8	12,9	6,5	34,5	10	1450	67
2928 1/4	G1/4	16,6	7	42,5	10	2730	72
2928 3/8	G3/8	18,8	11,5	67,5	10	6450	74
2928 1/2	G1/2	24,8	10,5	79,5	10	8350	87
2928 3/4	G3/4	38	15	139	10	14475	96

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com
This document contains a description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com

Silencers Series 2929



SIL1

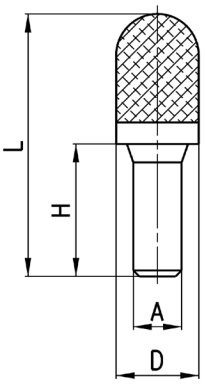


Mod.	A	D	H	L	Max. oper. pressure	Flow rate [Nl/min]	Noise db (A)
2929 4	4	7	15,5	31,5	10	380	66
2929 6	6	12,5	20,5	45	10	660	80
2929 8	8	13,5	21,5	43,5	10	1300	83
2929 10	10	15,5	26,5	57,5	10	2800	92
2929 12	12	18,5	29	83	10	4200	94

Silencers Series 2938





SIL1

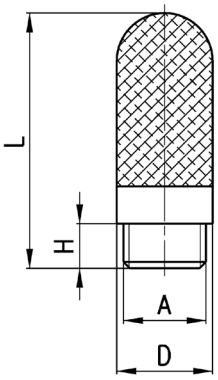


Mod.	A	D	H	L	Max. oper. pressure	Flow rate [Nl/min]	Noise db (A)
2938 M5	M5	6,5	4,1	23	10	546	67
2938 1/8	G1/8	12,5	5,7	34	10	1441	75
2938 1/4	G1/4	15,5	7	42,5	10	2752	79
2938 3/8	G3/8	18,5	11,5	67,5	10	4735	73
2938 1/2	G1/2	23,5	11	77	10	8534	86


Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com
This document contains a description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com

SILENCERS
SERIES 29 - DIMENSIONS

Silencers Series 2939




SIL1

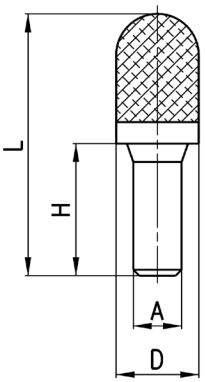

Mod.	øA	D	H	L	Max. oper. pressure	Flow rate (Nl/min)	Noise db (A)
2939 4	4	7	16	32	10	335	80
2939 6	6	12,5	20,5	45	10	632	79
2939 8	8	13,5	21,5	43,5	10	1229	89
2939 10	10	15,5	26,5	57,5	10	2650	87

Silencing bush Series 2905



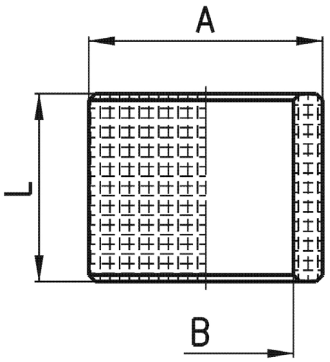

Mod.	A	B	L
2905 1/8	14	10	14.5
2905 1/4	18	13.5	14.5
2905 3/8	21	16.8	14.5

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com
This document contains a description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com